




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04Q 1/457, 1/453	A1	(11) International Publication Number: WO 97/20438 (43) International Publication Date: 5 June 1997 (05.06.97)
(21) International Application Number: PCT/US96/16492 (22) International Filing Date: 15 October 1996 (15.10.96) (30) Priority Data: 08/563,973 29 November 1995 (29.11.95) US (71) Applicant: ADVANCED MICRO DEVICES, INC. [US/US]; Mail Stop 562, 5204 East Ben White Boulevard, Austin, TX 78741 (US). (72) Inventors: XIE, Zheng-yi; 809 Mintum Lane, Austin, TX 78748 (US). BARTKOWIAK, John, G.; 1203 Wilderness Cove, Austin, TX 78746 (US). (74) Agent: MILLER, Louise, K.; Advanced Micro Devices, Inc., Mail Stop 562, 5204 East Ben White Boulevard, Austin, TX 78741 (US).		(81) Designated States: JP, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: SYSTEM AND METHOD FOR DUAL TONE MULTIFREQUENCY DETECTION USING VARIABLE FRAME WIDTHS**(57) Abstract**

An improved dual tone multifrequency (DTMF) signal detector which uses the Goertzel DFT algorithm and which utilizes variable or differing frame widths that are frequency dependent for improved detection and reduced error. The DTMF detector includes a codec receiver which receives signals from the transmission media, and a digital signal processor (DSP) coupled to the codec. The DSP receives the digital samples and preferably applies the Goertzel DFT algorithm using differing frame lengths according to the present invention. The DTMF detector utilizes a different frame width for different tones of the possible tone frequencies according to the present invention. Thus the calculation uses a different frame length N for different ones of the uncorrelated frequencies, wherein the different frame lengths comprise at least a subset N of the number of digital samples. The different frame lengths N are designed to optimally align the calculated frequency spectrum at each of the different uncorrelated frequencies. The calculation produces an energy value for each of the different uncorrelated frequencies. The DTMF detector preferably multiplies a gain value with each of the energy values to adjust the gain of each of the energy values. After the frequency domain calculation, i.e., after energy values have been calculated for each of the different uncorrelated frequencies, and after any desired gain adjustment, the DSP determines maximum values of the energy values for each of the two or more frequency groups to detect the plurality of tones in the received signal. The DTMF detector also performs various other calculations to ensure valid tone detection.

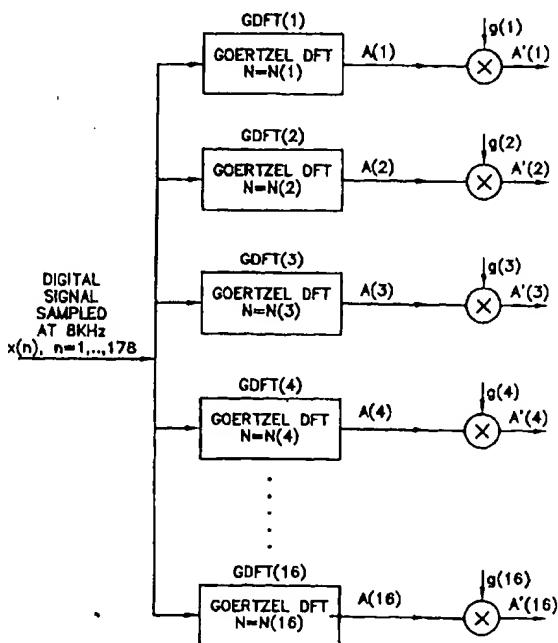
 $N(1)=172; N(2)=177; N(3)=178; N(4)=178; N(5)=172$
 $N(6)=168; N(7)=168; N(8)=176; N(m)=N(m-8), \text{ for } m=9, \dots, 16$

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Title: System and Method for Dual Tone Multifrequency Detection Using Variable Frame Widths

Field of the Invention

5 The present invention relates to the detection of dual tone multifrequency coded signals, and more particularly to a DTMF detector which computes the frequency spectrum of a received signal using a variable frame size for increased speed and accuracy.

Description of the Related Art

10 Dual tone multifrequency (DTMF) coding is a generic name for push-button telephone signaling which is used in North American telephone systems. A DTMF signal is used for transmitting a phone number or the like from a push button telephone to a telephone central office. DTMF signaling is quickly replacing dial pulse signaling in telephone networks worldwide. In addition to telephone call signaling, DTMF coding is also becoming popular in interactive control applications, such as telephone banking,
15 electronic mail systems, and answering machines, wherein the user can select options from a menu by sending DTMF signals from a telephone.

A dual tone signal is represented by two sinusoidal signals whose frequencies are separated in bandwidth and which are uncorrelated in order to avoid false tone detections. In general, normal speech patterns or noise signals produce a signal with energy distributed throughout the frequency band. In some
20 cases, speech may have sufficient energy on both DTMF frequencies to trigger a false detection.

As noted above, a DTMF signal encoder generates a DTMF signal by adding together two sinusoidal signals. A DTMF signal includes one of four tones, each having a frequency in a low frequency band, and one of four tones, each having a frequency in a high frequency band. In current DTMF systems, the following frequencies are allocated for the four tones in the low frequency band: FA = 697 Hz; FD = 770
25 Hz; FC = 852 Hz, and ; FD = 941 Hz; and the following frequencies are allocated for the four tones in high frequency band: FE = 1209 Hz; FF = 1336 Hz; FG = 1447 Hz, and FH = 1633 Hz. The frequencies used for DTMF encoding and detection are defined by the CCITT and are accepted around the world, thus allowing dialing compatibility throughout the world.

As DTMF signals travel down a transmission line, such as a telephone line, the signals may become
30 distorted due to attenuation or to any number of other affects, such as channel noise, radiation, etc. In addition, in some instances, voice or speech signals are propagated down a telephone line simultaneously with DTMF signals. Due to noise affects or speech, a DTMF signal can be missed by the detector. This is referred to as "talk-down". Also, speech can have a frequency domain content similar to a DTMF signal and trigger erroneous detection, this being referred to as a "talk-off" effect. Noise other than speech can also
35 cause adverse effects, and the receiver thus is sometimes unable to discern which DTMF signal has been detected.

The CCITT and AT&T have promulgated various standards for DTMF detectors. These standards involve various criteria, such as frequency distortion allowance, twist allowance, noise immunity, guard time, talk-down, talk-off, acceptable signal to noise ratio, and dynamic range, etc. The distortion allowance
40 criteria specifies that a DTMF detector is required to detect a transmitted signal that has a distortion allowance less than 1.5%. The term "twist" refers to the difference, in decibels, between the amplitude of the

strongest key pad row tone and the amplitude of the strongest key pad column tone. In general, the twist is required to be between -4 and +8 decibels. The noise immunity criteria requires that if the signal has a signal to noise ratio (SNR) greater than 12 decibels, then the DTMF detector is required to not miss the signal, i.e., is required to detect the signal. The guard time check criteria requires that if a tone has a duration greater than 40 milliseconds, the DTMF detector is required to detect the tone, whereas if the tone has a duration less than 20 milliseconds, the DTMF detector is required to not detect the tone. Speech immunity refers to the ability of the DTMF detector to accurately distinguish DTMF tone signals from actual speech. In other words, speech immunity refers to the ability of the DTMF detector to detect DTMF signals in the presence of speech, this being referred to as talk down. The term "talk off" refers to a DTMF detector inadvertently detecting speech as a DTMF signal.

Originally, DTMF signal generators and detectors utilized analog circuitry to generate and decode DTMF signals. However, with the rapid advance of VLSI technology and digital signal processing (DSP) technology, many DTMF systems are now employing digital signal processors for increased accuracy and cost efficiency. The advantages of a digital DTMF generation and detection system include improved accuracy, precision, stability, versatility and reprogrammability, as well as lower chip count. The advantages of a DSP implementation of a DTMF system are especially valid for a telephone company Central Office, where DTMF detection can be simultaneously performed on multiple telephone channels.

In general, a DTMF detector examines the line or communication channel for the presence of two sinusoids using dedicated frequency domain algorithms, including modified Goertzel algorithms, DFT/FFTs, auto-correlation, zero crossing counting, and narrow band filter-based methods, among others. The Goertzel algorithm is the most popular algorithm used in DTMF signal detection because it has the accuracy of a DFT-based algorithm while also having computational efficiency comparable to narrowband filter-based algorithms. Conventional use of the Goertzel algorithm is similar to DFT methods, which compute values in the frequency domain at desired discrete points. As a result, this method has the disadvantage of the DFT, whereby the computed results may not be sufficiently close to the desired frequencies where tones may be located, thus reducing accuracy. This problem is exacerbated by the fact that the DTMF frequencies desired to be detected are deliberately chosen to be uncorrelated for improved detection.

Therefore, in order to achieve sufficient resolution and thus sufficient accuracy, the window size or frame size is required to be fairly large. As a result, conventional DTMF detectors using a fixed frame size to compute frequency domain values generally also have the disadvantage of slow detection and high computational costs to produce each result. Thus improved DTMF signal detection techniques are desired which have increased accuracy and improved efficiency.

Summary of the Invention

The present invention comprises an improved dual tone multifrequency (DTMF) or multitone signal detector which more efficiently and reliably detects DTMF signals. The present invention uses a frequency domain detection method, such as a modified version of the Goertzel DFT algorithm, and utilizes variable or differing frame widths that are frequency dependent for improved detection and reduced error.

The DTMF detector according to the present invention preferably includes a coder/decoder (codec) receiver which receives signals from the transmission media. The codec samples the received analog signals and produces digital signals, i.e., digital samples. The DTMF detector also includes a digital signal processor (DSP) coupled to the codec. The DSP receives the digital samples and preferably applies the Goertzel DFT algorithm using differing frame lengths according to the present invention. The present invention further includes a memory coupled to the DSP which is used by the DSP for temporary storage of data during processing (RAM), and retrieval of data such as filter coefficients (ROM).

According to the present invention, the DTMF detector receives a plurality of digital samples of a received signal, wherein the received signal may include a plurality of tones, such as a DTMF or MTMF (multiple tone multifrequency) signal. The received signals may include DTMF or MTMF tone signals and also may include one or more speech signals and/or noise. The plurality of tones comprise two or more tones from a plurality of different uncorrelated frequencies. In one embodiment, the plurality of different uncorrelated frequencies comprise two or more frequency groups. After receiving the digital samples, the DTMF detector calculates a frequency spectrum of the plurality of digital samples for each of the plurality of different uncorrelated frequencies.

The DSP preferably uses the Goertzel algorithm to compute the frequency spectrum. The Goertzel DFT algorithm divides the sampled time domain signal into a plurality of discrete blocks or frames and then performs Fourier techniques to obtain energy values in the frequency domain. The DTMF detector utilizes a different frame width for different tones of the possible tone frequencies according to the present invention. Thus the calculation uses a different frame length N for different ones of the uncorrelated frequencies, wherein the different frame lengths comprise at least a subset N of the number of digital samples. The different frame lengths N are designed to optimally align the calculated frequency spectrum at each of the different uncorrelated frequencies. It is noted that the same frame length may be used for certain of the frequencies. The calculation produces an energy value for each of the different uncorrelated frequencies.

It is noted that calculating the frequency spectrum using different frame lengths N produces differing energy contents in a plurality of the energy values. Thus the DTMF detector preferably multiplies a gain value with each of the energy values to adjust the gain of each of the energy values. After the frequency domain calculation, i.e., after energy values have been calculated for each of the different uncorrelated frequencies, and after any desired gain adjustment, the DSP determines maximum values of the energy values for each of the two or more frequency groups to detect the plurality of tones in the received signal. The DTMF detector also performs various other calculations to ensure valid tone detection.

Therefore, the present invention comprises a DTMF detector and method for more accurately detecting the presence of two or more tones in a received signal. The present invention uses frequency domain techniques and uses different frame widths for different tones of the DTMF tone frequencies for improved speed and accuracy.

Brief Description of the Drawings

A better understanding of the present invention can be obtained when the following detailed description of the preferred embodiment is considered in conjunction with the following drawings, in which:

Figure 1 is a block diagram of the DTMF detector of the present invention.

5 Figure 2 is a flowchart diagram illustrating operation of the DTMF detector of the present invention;

Figure 3 illustrates a plurality of filters in the DTMF detector of Figure 1, which apply the Goertzel algorithm using a variable frame length according to the present invention;

Figure 4 illustrates operation of the Goertzel algorithm;

10 Figure 5 is a block diagram illustrating logic which finds the maximum gain in each group of detected tones;

Figure 6 illustrates operation of static thresholding in the flowchart diagram of Figure 2;

Figure 7 illustrates operation of the dynamic thresholding in the flowchart diagram of Figure 2;

Figure 8 illustrates operation of the second harmonic energy threshold check in the flowchart of Figure 2;

15 Figure 9 illustrates operation of guard time checking functions performed by in the flowchart of Figure 2; and

Figure 10 illustrates operation of twist checking functions in the flowchart of Figure 2.

Detailed Description of the Preferred EmbodimentIncorporation by Reference

The following U.S. patents and references are hereby incorporated by reference:

5 U.S. Patent No. 5,408,529 titled "Dual Tone Detector Operable in the Presence of Speech or Background Noise and Method Therefor" -- Greaves, issued April 18, 1995, is hereby incorporated by reference.

U.S. Patent No. 5,428,680 titled "DTMF Signal Receiving Apparatus Equipped With a DTMF Signal Judging Circuit" -- Murata et al., issued June 27, 1995 is hereby incorporated by reference.

10 U.S. Patent No. 5,257,309 titled "Dual Tone Multifrequency Signal Detection and Identification Methods and Apparatus" -- Brandman et al., issued October 26, 1993 is hereby incorporated by reference.

U.S. Patent No. 5,353,345 titled "Method and Apparatus for DTMF Detection" -- Galand, issued October 4, 1994 is hereby incorporated by reference.

15 U.S. Patent No. 5,426,696 titled "Method of Improving Receiver Sensitivity and Speech Immunity With DTMF-Reception" -- Zimbek, issued June 20, 1995 is hereby incorporated by reference.

U.S. Patent No. 5,325,427 titled "Apparatus and Robust Method for Detecting Tones" -- Dighe, issued June 29, 1994 is hereby incorporated by reference.

"Digital Signal Processing Applications Using the ADSP-2100 Family", from Analog Devices Corporation, Volume 1, Chapter 14, pages 441-500 is hereby incorporated by reference in its entirety.

DTMF Detector

20 The present invention comprises a DTMF detector which utilizes a variable frame size or differing frame sizes according to the present invention. The DTMF detector is comprised in a digital telephone answering machine in the current embodiment. However, it is noted that the present invention may be used in various other applications, including telephone switching and interactive control applications, telephone banking, fax on demand, etc. The DTMF detector of the present invention may also be used as the DTMF detector in a telephone company Central Office, as desired.

25 The present invention was designed to meet CCITT and AT&T standards, although the invention can be reprogrammed or undergo minor modifications to meet other telecommunication standards. The preferred embodiment was developed to perform DTMF detection functions and preferably comprises a dual tone detector which detects two tones, wherein each tone is one of a plurality of predetermined tones from two respective frequency groups. However, the present invention may comprise a multi tone multi frequency (MTMF) detector for detecting a greater number of tones in a received signal, i.e., two or more tones. The two or more tones may be from two or more different frequency groups or from a single frequency group, as desired. Thus the system and method of the present invention may be used for detecting any number of tones in a received signal.

Figure 1 - Block Diagram

30 Referring now to Figure 1, a block diagram of a DTMF detector 102 according to the present invention is shown. As shown, the DTMF detector 102 preferably comprises a port or connector or other

means 103 for receiving analog or digital signals. The port 103 is adapted for coupling to a communications medium, such as a phone line, cable or other transmission line. It is noted that the port 103 may comprise any of various means or connectors for coupling to a communications line.

5 The DTMF detector 102 also preferably comprises a coder/decoder (codec) receiver 104 coupled to the port which receives an analog signal and converts the analog signal into digital format. The codec receiver 104 preferably samples the analog signal at 8 kHz and utilizes pulse code modulation (PCM) or other suitable techniques to produce corresponding digital data. The codec chip 104 preferably comprises linear analog to digital (A/D) converters and digital to analog (D/A) converters. The codec receiver 104 preferably comprises all the necessary A/D, D/A, sampling and filtering circuitry for bi-directional analog
10 digital interfacing. Once analog to digital conversion has been performed, digital data or digital samples are generated based upon the analog signal.

It is noted that the received signal may be compressed or companded, and thus digital data produced by the A/D converter in the codec 104 may be companded, i.e., may comprise logarithmically compressed digital data. As is well-known in the art, companding refers to logarithmically compressing a signal at the
15 source and expanding the signal at the destination to obtain a high end-to-end dynamic range while reducing dynamic range requirements within the communication channel. In this instance, the codec receiver 104 logarithmically expands the data to a linear format, preferably a 16 bit linear format.

In one embodiment, the port 103 in the DTMF detector 102 receives digital signals (i.e., linear or logarithmic PCM) directly from the communication channel or transmission media, and thus a codec 104 is
20 not required in the DTMF detector 102 for analog to digital conversion.

The DTMF detector 102 also preferably includes a digital signal processor (DSP) 106 coupled to the codec 104. The DSP 106 is preferably from the ADSP-2100 family from Analog Devices, Inc. Other equivalent DSPs are acceptable, although a DSP that can perform 16 x 16 bit hardware multiplication is preferred for accuracy reasons. It is noted that a software multiplier may be used, although the operating
25 speed will be significantly reduced.

The DSP 106 receives the digital samples and preferably applies frequency domain techniques, preferably the Goertzel DFT algorithm, using variable or differing frame lengths according to the present invention. The Goertzel DFT algorithm divides the sampled time domain signal into a plurality of discrete blocks or frames and then performs Fourier techniques on each frame to obtain energy values in the
30 frequency domain for each of the possible tones. The DTMF detector 102 utilizes differing frame widths for different ones of the possible tone frequencies according to the present invention. In other words, the DTMF detector 102 utilizes differing frame widths for at least a plurality of the possible tone frequencies.

The DTMF detector 102 further includes a memory 108 coupled to the DSP which is used by the DSP 106 for storage and retrieval of data. Preferably, the memory comprises a RAM (random access memory) for processing storage and loading of program at the time of operation, and a ROM (read-only
35 memory) for storage of fixed values, such as filter coefficients and other parameters used by the program. The program is also preferably stored in the ROM before loaded into RAM. The memory requirement for the DTMF detector alone is about 2.0 kbytes of ROM and 200 bytes of RAM. The memory requirement is architecturally dependent and also depends on implementation. It is noted that the memory 108 may
40 comprise any of various types or sizes, as desired.

It is noted that the present invention may include a general purpose microprocessor instead of DSP 106. The present invention may also include dedicated digital and/or analog hardware instead of, or in addition to, the DSP 106. Thus, although the following description describes the DSP 106 performing the present invention, it is noted that the present invention may be performed by a general purpose microprocessor, or the present invention may be at least partially or totally implemented in digital or analog logic, as desired. The use of a programmable DSP 106 is the preferred embodiment of the invention.

Figure 2 - Flowchart Diagram

Referring now to Figure 2, a flowchart diagram illustrating operation of the DTMF detector 102 according to the preferred embodiment of the present invention is shown. The DTMF detector 102 is coupled to a transmission media. As shown, the DTMF detector 102 receives an analog signal and determines whether dual tone multi frequency (DTMF) signals are comprised within the received signal. As shown, the received analog signal may comprise one or more of a DTMF signal, a speech or voice signal, or noise. In step 122, the codec 104 in the DTMF detector 102 receives the analog signal and converts the analog signal into digital format. In step 122 the codec receiver 104 preferably samples the analog signal at 8 kHz and performs pulse code modulation (PCM) or other suitable techniques to produce corresponding digital data. As shown, the codec receiver 104 produces a digital signal referred to as $x(n)$, which is sampled at 8 kHz.

It is also noted that the received signal may be logarithmically compressed or companded, and thus step 122 may further comprise logarithmically expanding the compressed data to produce linear data.

The following comprises a brief description of steps 124 - 140, and a more detailed description of each of the steps follows. In step 124 the DSP 106 receives the digital signal $x(n)$ from the codec 104 and performs the Goertzel DFT using differing frame lengths according to the present invention. In step 124 the DSP 106 produces a plurality of energy values $A(m)$ where $m = 1-16$. The plurality of energy values $A(m)$ comprise energy values at each of the two sets of four frequency tones for the first and second harmonics of the frequencies. In step 126 the DSP 106 adjusts the gain of each of the energy values $A(m)$ to compensate for differing energy content due to the differing frame lengths. The DSP 106 in step 126 produces a plurality of adjusted energy values $A'(m)$. In step 128 the DSP 106 determines the maximum level of the energy values $A'(m)$ in each frequency group.

In the following steps 130 - 138 the DSP 106 performs various tests to ensure valid tone detection. In steps 130 and 132 the DSP 106 performs static and dynamic thresholding respectively to ensure that the energy values $A'(m)$ meet certain basic criteria. The static and dynamic thresholding performed in steps 130 and 132 eliminate invalid DTMF tones based on both signal level and signal/noise ratio. After static and dynamic thresholding are performed in steps 130 and 132, in step 134 the DSP 106 performs second harmonic thresholding to prevent detection triggered by speech. The DTMF detector of the present invention examines the second harmonics of the fundamental DTMF frequencies using a novel ratio comparison method according to the present invention, which further distinguishes speech signals from DTMF signals.

In step 136 the DSP performs a guard time check to evaluate the frequency domain results and to ensure that the signal lasts at least a certain amount of time. The guard time check evaluates the maximum energy values in relation to prior and subsequent frames for improved detection. In step 138, the DSP

performs twist computation and thresholding. The present invention uses a novel twist computation technique which only performs the twist computation when the received signal is deemed stable, thus increasing accuracy. After the twist computation is performed in step 138, in step 140 the DSP decodes the digit using the column and row indices and outputs the pressed DTMF digit from the received DTMF signals. As noted in Figure 2, if any of the steps 130-140 fail, then no detection is indicated.

Step 124 - Goertzel DFT with Variable Frame Lengths

Referring again to Figure 2, in step 124 the DSP 106 receives the digital signal $x(n)$ from the codec 104 and performs the Goertzel DFT for each of the possible tone frequencies using varying or differing frame lengths according to the present invention. As discussed in the background section, decoding a DTMF signal involves detecting two tones in the received signal and then determining the number pressed by the user at the sending end based on the values of the detected tones. More generally, decoding a MTMF signal involves detecting a plurality of tones in the received signal.

CCITT recommendations Q.23 and Q.24 in the "Red Book", Volume VI define two groups of frequencies that are used for in-band signaling. Group 1 comprises the frequencies 697 Hz, 770 Hz, 852 Hz, and 941 Hz, and these frequencies identify the rows of the telephone keypad, and Group 2 comprises the frequencies 1209 Hz, 1336 Hz, 1477 Hz and 1633 Hz, and these frequencies identify the columns of the telephone keypad. The DTMF signals each contain one row and one column frequency, and these signals are assigned using the following table.

	1209 Hz	1336 Hz	1477 Hz	1633 Hz
697 Hz	1	2	3	A
770 Hz	4	5	6	B
852 Hz	7	8	9	C
941 Hz	*	0	#	D

Table 1: DTMF frequency assignments

The detection of the dual tones is performed by mathematically transforming the input time domain signal into the frequency domain using various Fourier transform techniques. As is well-known, the discrete Fourier transform (DFT) is commonly used to transform discrete time domain signals into their discrete frequency domain components. As also noted in the background section, the Goertzel algorithm is a popular method for performing the DFT computation. The Goertzel algorithm offers the accuracy of a DFT-based calculation, while having increased computational efficiency that is comparable to narrow band filter-based algorithms.

In general, the conventional usage of the Goertzel algorithm is similar to the DFT method and is performed by computing frequency domain values at the desired discrete points. As a result, the Goertzel algorithm also has the disadvantage of the DFT, whereby the computed results may not be sufficiently close to the desired frequencies desired to be detected, thus severely reducing accuracy. This is referred to as the leakage effect. In other words, the DTMF detector 102 is designed to detect dual tones which will occur at

specified predefined frequencies. In the preferred embodiment, these frequencies are 697 Hz, 770 Hz, 852 Hz, 941 Hz, 1209 Hz, 1336 Hz, 1477 Hz, and 1633 Hz. The frequencies used in the DTMF standard are not spaced at equal increments but rather are deliberately designed to be uncorrelated for more accurate detection.

5 As a result, if the conventional method of a fixed N (frame size) is used in the Goertzel algorithm, the frequencies are not optimally aligned at the frequency bins. The effect is that the desired outputs are not exactly at the frequency bins(multiples of F_s/N). This causes the energy to be distributed among neighboring frequency bins, referred to as leakage. Leakage can severely degrade the accuracy of the frequency domain outputs. The following table illustrates the effect of leakage using an example of the
10 Goertzel algorithm for DTMF frequency 852 Hz ($N = 205$).

error in K (%)	0.01	0.05	0.1	0.5	1.0	5.0
output gain (dB)	94.0	80.6	74.7	60.9	49.6	43.6
output error(dB)		> 13.4	> 19.3	> 33.1	> 44.4	> 50.4

15 Table 2: The effect of leakage Note: $K=N*f/f_s$

In general, it has been found that a fixed-frame size of 205 points produces the least error in a Goertzel/DFT computation. The inherent property of the DFT requires FNT to be equal to one, where F is
20 the frequency domain resolution, N is the frame size in number of samples, and is also the computed number of outputs in the frequency domain, and T is the smallest period and equals $1/F_s$, where F_s is the sampling frequency. In telephony applications, the period T is equal to $1/F_s = 1/8000$. Thus, in order to achieve sufficient resolution, the frame size N is required to be very large. As a result, detection of speech is generally slow and computational costs are higher for each result. Even worse, a large frame size may result
25 in the detection speed not meeting telecommunications standards.

Therefore, prior art DTMF detectors which utilize the Goertzel algorithm and/or the DFT and which utilize a fixed frame size N only compute frequency domain values in multiples of F_s/N , wherein F_s is the sampling frequency, typically 8000 Hz for telephony applications. Therefore, for example, if $F_s = 8000$ Hz and $N = 100$ sample points, the Goertzel algorithm only computes results at 80 Hz, 160 Hz, 240 Hz, etc.
30 Therefore, in summary, since the DTMF standard frequency values are designed to be uncorrelated, in general, no single frame size value N can be chosen which results in all of the desired frequencies lined up at the bins.

Therefore, the present invention performs the Goertzel algorithm utilizing a varying or differing frame size N for a plurality of the DTMF frequencies to provide increased accuracy and efficiency. The
35 DTMF detector 102 of the present invention preferably uses a different frame size for different DTMF tone frequencies and then adjusts the gain after the frequency domain values have been computed. This provides

increased accuracy and speed over prior art methods. The DTMF detector 102 of the present invention provides better frequency distortion allowance and better twist allowance.

Referring again to Figure 2, in step 124 the DSP 106 applies the Goertzel DFT method using different frame lengths according to the present invention. As shown, the DSP 106 receives a digital signal referred to as $x(n)$, wherein the digital signal $x(n)$ comprises a plurality of samples of a received signal. Referring now to Figure 3, The DSP effectively computes 16 Goertzel DFTs with different frame lengths $N(1) - N(16)$. The different frame lengths for each of the Goertzel DFTs are as follows:

$N(1), N(9) = 172;$
 $N(2), N(10) = 177;$
 $N(3), N(11) = 178;$
 $N(4), N(12) = 178;$
 $N(5), N(13) = 172;$
 $N(6), N(14) = 168$
 $N(7), N(15) = 168$
 $N(8), N(16) = 176$

As shown in Figure 3, the operation of the DSP is represented as 16 Goertzel DFT blocks labeled GDFT (1) - GDFT (16). Each of the Goertzel GDFT blocks, GDFT (1) - GDFT (16) produces a respective value $A(1) - A(16)$. The values $A(1) - A(16)$ are comprised of four smaller sub-arrays. The values $A(1) - A(16)$ are each provided to respective multipliers which multiplies the respective $A(n)$ value with a respective gain. These multipliers correspond to the gain adjustment in step 126 of Figure 2.

Referring now to Figure 4, a diagram illustrating operation of the Goertzel algorithm is shown. As noted above, the Goertzel algorithm evaluates the DFT of input data with reduced computation and with increased efficiency. Operation of the Goertzel algorithm is similar to a filter implementation, wherein the Goertzel algorithm does not require a buffer of input data items prior to operation, but rather computes a new output result with each occurrence of a new input sample. As shown in Figure 4, the Goertzel algorithm performs a second order recursive computation of the DFT by computing a new $Y_k(n)$ output for every new input sample $x(n)$. The DFT result, referred to as $X(k)$ is equivalent to $Y_k(n)$ when $n = N$, i.e., $X(k) = Y_k(N)$. As shown in Figure 4, the operation of the Goertzel algorithm can be divided into two phases. The first phase involves computing the feedback legs in Figure 4. The second phase computes the feed forward when $n = N$ and thus evaluates the value $X(k)$. As discussed above, in the present invention the DSP 106 performs the Goertzel algorithm shown in Figure 4 using a different frame length for different ones of the DTMF frequency values.

After the Goertzel DFT is applied to the received digital signal using variable frame lengths according to the present invention in step 124, the result is a plurality of frequency spectra values $A(m)$ corresponding to the 8 DTMF standard frequencies or tones for the first and second harmonics.

The following two tables compare the Goertzel algorithm implementation using a fixed frame size and a variable frame size. The first table below illustrates an example using $N = 205$ as the fixed frame size and shows the K errors. It is noted that a fixed frame size of $N = 205$ is the best possible selection and produces the least maximum error for all K values.

$$K = N * f / f_s = 205 * f / 8000 = 0.025625 f$$

DTMF frequency	K(floating point)	K (integer)	absolute error of K	% error of K
697 Hz	17.861	18	0.139	0.78 %
770 Hz	19.731	20	0.269	1.36 %
852 Hz	21.833	22	0.167	0.76 %
941 Hz	24.113	24	0.113	0.47 %
1209 Hz	30.981	31	0.019	0.06 %
1336 Hz	34.235	34	0.235	0.69 %
1477 Hz	37.848	38	0.152	0.40 %
1633 Hz	41.846	42	0.154	0.37 %

5

The transfer function for Goertzel algorithm is

$$H(z) = \frac{1}{1 - 2 \cos(2\pi k / N) z^{-1} + z^{-2}}$$

10

where

$$z = e^{-j2\pi k / N}$$

15

Based on the above information, it is very important to reduce the error of the K values.

As discussed above, the system and method of the present invention uses different N values for different frequencies. The table below describes the different N values or frame sizes used according to the preferred embodiment of the invention for the different DTMF tone frequencies. The table also illustrates the associated K errors:

20

Std. DTMF frequency	N	K (floating point)	K(integer)	Absolute error of K	% error of K
697 Hz	172	14.985	15	0.014	0.09 %
770 Hz	177	17.036	17	0.036	0.20 %
852 Hz	178	18.957	19	0.043	0.20 %
941 Hz	178	20.937	21	0.063	0.30 %
1209 Hz	172	25.993	26	0.007	0.02 %
1336 Hz	168	28.056	28	0.056	0.20 %
1477 Hz	168	31.017	31	0.017	0.05 %
1633 Hz	176	35.926	36	0.074	0.20 %

25

Using this method, the present invention reduces the K error to less than 0.3 %, as compared with up to 1.36 % for prior art methods using fixed N. In addition, the N values or frame sizes are reduced from 205 to 178 or less, which allows earlier detection by 15% or more. Therefore, the DSP 106 preferably uses up to 178 digital speech samples which are input to the Goertzel algorithm. A different number of these samples are used for the different tone frequencies. Application of the Goertzel algorithm produces an array

of 16 frequency domain values, wherein the outputs are basically discrete Fourier transform results. Eight of these values are for the fundamental frequencies and eight are for the second harmonics. This is illustrated in Figures 3 and 4.

Most DFT/Goertzel based algorithms have difficulty meeting the required frequency distortion allowance. The frequency distortion allowance requires that all DTMF signals with a certain percentage of frequency distortion have to be detected as valid DTMF tones. However, if the distortion exceeds a certain larger percentage, then detection must be denied. The frequency distortion allowance criteria is described below.

Let F_{dtmf} be a standard frequency and F is the actual frequency. Then:

if $F_{dtmf} * (1 - 2.5\%) < F < F_{dtmf} * (1 + 2.5\%)$, then it is a valid tone
 if $F > F_{dtmf} * (1 + 3.5\%)$ or $F < F_{dtmf} * (1 - 3.5\%)$ then it is not a valid tone.

One advantage of using variable frame sizes is that the DTMF detector 102 more easily meets the required frequency distortion allowance. If the desired frequency is located exactly at the bin (the detecting frequency) of the Goertzel algorithm, then +2.5 % error in the input frequency decreases the output the same amount as a -2.5 % error in the signal. The reason is that both errors are at the same distance from the bin. This is not the case if the desired frequency has error relative to the bin, it being noted that error is unavoidable if a fixed frame size is used. For example, assume that the desired frequency is 2.0 % bigger than the frequency bin. In this example, -2.0% error in the input signal moves the frequency nearer to the bin and generates the largest output result. On the other hand, +2.5 % error moves the frequency further away from the bin and generates a very small output. The asymmetric effect makes it very difficult to set the threshold for frequency distortion allowance test, therefore not meeting the very stringent telecom standards. Significant computational resources are necessary to determine if an energy value is at the right side or left side of the frequency bin. Therefore, setting different thresholds for left and right side distortion, i.e., actual frequency greater or smaller than the desired frequency, is not an adequate solution.

Step 126 - Gain Adjustment

In step 126 the DSP 106 preferably performs gain adjustment, as shown in Figure 3. Calculating the frequency spectrum using different frame lengths N produces differing energy contents in a plurality of the energy values. Thus the DTMF detector 102 preferably multiplies a gain value with each of the energy values to adjust the gain of each of the energy values. It is noted that the present invention provides better results even without gain adjustment. However, gain adjustment is desirable since different frame lengths have been applied to different frequencies and also because different Goertzel algorithm transfer functions have different gains at the narrow pass band. Thus the present invention preferably adjusts the gain in order to more correctly evaluate the results in the array $A[1...16]$. After the gain adjustment in step 126, the result is a modified frequency spectra values $A'(m)$.

The gains were computed and also verified using laboratory method. The gain adjustments used in the preferred embodiment are listed below:

Freq(Hz):	Gain factor:
697	1.00000000
770	0.98902064
852	0.97439963
941	0.97849229
1209	1.00475907
1336	1.03484721
1477	1.02940728
1633	0.99550578

5 In the preferred embodiment, the DTMF detector 102 does not use the second harmonic outputs for computing twist. Therefore, gain adjustment for the second harmonics is less important. Thus, in the preferred embodiment, gain adjustment for the second harmonics is not performed in order to save computational resources. Assuming the gain factor for frequency F1 is G1, then the gain adjustment is calculated by performing:

$$10 \quad A'(1) = G1 * A(1)$$

This is performed on the first eight elements in the Goertzel output array A[1,...,8], i.e., the first harmonics, and a new array A'[1,...,16] is generated. The new array comprises the gain adjusted Goertzel DFT output. It is noted that the array elements A[9...16] are not adjusted and thus these values remain the same, i.e., A'[9...16] = A[9...16].

15

Step 128 - Determining the Maximum Gain in Each Frequency Group

As noted above, the gain adjustment performed in step 126 produces four sub-arrays of the first and second harmonics of the row and column frequencies of the DTMF standard frequencies. In other words, the array A'[1,...,16] is comprised of four smaller arrays. Sub-array A'[1,...,4] comprises the values for the fundamental row frequencies and determines the row to which the pushed key belongs. Sub-array A'[5,...,8] comprises the values for the fundamental column frequencies and determines the column to which the pushed key belongs. The sub-array A'[9,...,12] comprises the DFT values for the second harmonics of the row frequencies, and the sub-array A'[13,...,16] comprises the values for the second harmonics for the column frequencies.

25 Referring now to Figure 5, a block diagram is shown illustrating operation of step 128 in Figure 2. As shown in Figure 5, operation of the DSP 106 is represented as four blocks 151, 152, 153, and 154, wherein each of the blocks determines the value in the respective sub-array that has the maximum value or gain. The blocks 151 and 152 for the two first harmonic sub-arrays also obtain the respective index of the maximum gain value. The blocks 151 and 152 for the sub-arrays A'[1,...,4] and A'[5,...,8] each provide outputs comprising the maximum value in the sub-array and the respective index. The blocks 153 and 154 for the sub-arrays A'[9,...,12] and A'[13,...,16] provide outputs comprising the respective maximum values in each of the sub-arrays.

30

Thus in step 128 the DSP 106 determines the maximum value in the first two sub-arrays and the respective indices within the sub-array. This step can be described using pseudo code:

```

        M[1]= 0; I[1]= 0;
        for ( i = 1 to 4) {
            if A'[i] > M[1] then
5              M[1] = A'[i];
              I[1] = i;
            endif
        }

        M[2] = 0; I[2]= 0;
10       for (i = 5 to 8) {
            if A'[i] > M[2] then
              M[2] = A'[i];
              I[2] = i;
15         endif
      }

```

Thus, in step 128 the DSP 106 obtains the maximum values of the row and column frequency group (M[1], M[2]) and their respective index (I[1], I[2]) for the first harmonic sub-arrays. In the preferred embodiment, the DSP 106 does not determine the indices for the second harmonics. Rather the DSP 106 only obtains the maximum frequency output for the second harmonics of the row frequency, M[3], and the maximum frequency output for the second harmonics of the column frequency, M[4], as shown in Figure 5.

Steps 130 and 132 - Static and Dynamic Thresholding

The present invention also includes a method for improving the DTMF detector's functional dynamic range and noise immunity by performing static thresholding followed by dynamic thresholding. This method increases the functional input signal dynamic range and has greater speech/noise immunity, i.e., is more able to avoid detection triggered by speech or noise. The static and dynamic thresholding performed in steps 130 and 132 eliminate invalid DTMF tones based on both signal level and signal/noise ratio. The use of both static and dynamic thresholding allows a small static threshold to be selected, thus providing the DTMF detector with a wider dynamic range. The dynamic thresholding in step 132 essentially performs a signal/noise ratio estimate, preferably using the ratio between the maximum value in the group and the second largest value in the sub-array. The dynamic threshold performed in step 132 provides a threshold comparison using an acceptable signal/noise ratio, which effectively prevents noise or speech-triggered detection, i.e., provides better speech immunity.

Referring now to Figure 6, a flowchart diagram illustrating operation of the static thresholding step 130 is shown in Figure 1. As shown, the maximum values from the first two sub-arrays corresponding to the first harmonic row and column frequency values are received in the static thresholding step 130. As shown, in step 242 the DSP 106 determines if $M(1) > T_s$, i.e., if the maximum value of the first sub-array is greater than T_s . If not, then no detection occurs and operation completes. If $M(1) > T_s$ in step 242, then in step 244 the DSP determines if the value $M(2)$ is greater than T_s . If not, then again no detection is determined. If both $M(1)$ and $M(2)$ are greater than the threshold value T_s , then dynamic thresholding is performed on these values in step 132 of Figure 2.

Referring now to Figure 7, the dynamic thresholding step 132 is shown. As shown, the dynamic thresholding step compares the ratio of the maximum value $M(1)$ in the first sub-array to each of the other values in the sub-array $A'[1]$, $A'[2]$, $A'[3]$ and $A'[4]$, and sets the signal/noise ratio error as the minimum

ratio. Likewise, the DSP 106 in step 132 determines the minimum ratio of $M(2)$ with each of the other values from the sub-array $A'[5]$, $A'[6]$, $A'[7]$ and $A'[8]$, and sets the signal/noise ratio accordingly. More specifically, in Figure 7 the DSP 106 compares the ratio of the maximum value $M1$ and each of the other values in the sub-array $A'[1]$, $A'[2]$, $A'[3]$ and $A'[4]$ with a value T_d and sets the SNR error as the ratio which is less than T_d . Likewise, the DSP 106 compares the ratio of the maximum value $M(2)$ and each of the other values in the sub-array $A'[5]$, $A'[6]$, $A'[7]$ and $A'[8]$ with a value T_d and sets the SNR error as the ratio which is less than T_d . Because $T_d = 10^{(\text{required SNR in dB}/20)}$, setting the SNR error means that either or both the column and row frequency values do not meet the required SNR. If SNR error is set, no detection is indicated.

Thus the frequency domain values ($A'[1, \dots, 16]$) obtained through the Goertzel algorithm and gain adjustment are compared against thresholds using both static and dynamic techniques. In the preferred embodiment, the static threshold is set to 6 (which provides a theoretical functional dynamic range of over 50 dB) and the dynamic threshold is set to 4 (about 12 dB). This allows very small DTMF signals (wide dynamic range) to be detected, as long as the signals have an acceptable signal to noise ratio. This also effectively eliminates most idle channel noise, speech, and white noise.

Step 134 - Second Harmonic Thresholding

In step 134, the DSP 106 performs second harmonic thresholding to further examine the validity of the detected tones and eliminate speech triggered DTMF detection. This occurs before DTMF detection and usually is a continuous task for the DSP 106, even after the channel has been established. The human voice, especially the female voice, can have a large amount of energy components over 1000 Hz and can be mistaken as DTMF signal. Some music can also trigger DTMF detection. Thus speech detection and/or speech immunity is a very important criteria for evaluating the quality of a DTMF detector.

As discussed above, a real DTMF signal is the sum of two sinusoids and has two steep peaks in the frequency domain. Thus, a real DTMF signal does not have significant energy at second or higher harmonics. Speech on the other hand generally always has a significant amount of energy at the second and higher harmonics. This characteristic of speech make it easier to distinguish speech from DTMF signal. Thus the present invention examines the second harmonics of the fundamental DTMF frequency.

Prior art methods have conventionally examined the value of the second harmonics, $A'[9, \dots, 16]$. According to the present invention, the DSP 106 compares the second harmonics with the values at the fundamental harmonics, $A'[1, \dots, 8]$. The DSP 106 computes the ratio of $M[1]/M[3]$ and $M[2]/M[4]$, and compares the results with a pre-set threshold.

It is noted that the ratio $A'[i] / A'[i+8]$ (assuming $A'[i]$ is the biggest value in its group) is not used because, if the speech has some energy at a frequency $x\%$ away from the bin, its second harmonic will have a distance of $2x\%$ from the second harmonic bin. Therefore, the present invention uses the maximum value in the second harmonic group to provide an estimate of the energy at the second harmonics. This is beneficial to talk-off performance of the DTMF detector.

Referring now to Figure 8, a flowchart diagram illustrating operation of the second harmonic thresholding performed in step 134 of Figure 2 is shown. As shown, in Figure 8 the DSP 106 compares the ratio of the maximum values of the first and second harmonics, $M1/M3$, with the threshold value T_{sh} , and

also compares the ratio of the maximum values of the first and second harmonics of the column frequency, i.e., the ratio $M2/M4$, and determines if this value is greater than the threshold T_{sh} . If either of the ratios $M1/M3$ or $M2/M4$ are not greater than the threshold T_{sh} , then a speech error signal is generated indicating that the detected signal actually corresponds to speech and not to a DTMF signal.

Step 136 - Guard Time Check

The present invention discloses an improved guard time check method which overcomes the difficulty of meeting the guard-time performance requirement when using frame based processing methods (such as the Goertzel algorithm). The present invention also uses a larger cut-off duration value (but less than $T1$) as described below. A larger cut-off duration value provides better talk-off performance for the DTMF detector. This is because speech triggered 'fake DTMF signals' tend to have a short duration, while also having a frequency domain energy presentation which appears like a DTMF signal.

The guard-time parameter requires that all DTMF signals having a duration longer than $T1$ be detected as valid DTMF tones, i.e., no misses are allowed), whereas all DTMF signals shorter than $T2$ ($T2 < T1$) can not be detected as valid DTMF signals. All tones have a duration between $T1$ and $T2$ are 'don't care' which means the detector has the flexibility to either detect or miss the signal. In general, it is deemed desirable to have a fixed cut-off value to warrant the guard-time performance.

The AT&T standard, and most other standards, require that any DTMF sequence longer than 40 ms must be accepted if it meets all other criteria. A DTMF sequence shorter than 20 ms should never be detected. Since the DTMF detector 102 of the preferred embodiment processes the speech sample as blocks, the DTMF detector 102 compares the maximum values ($M[1]$ and $M[2]$) with the values from the previous and next frame to determine if the DTMF signal lasts at least 40 ms.

Referring now to Figure 9, a flowchart diagram illustrating the guard time check operation performed in step 136 of Figure 1 is shown. As shown, in step 312 the DSP 106 determines if the index values $I[1]$ and $I'[1]$ are equal and index values $I[2]$ and $I'[2]$ are equal. Thus, this step determines if the DTMF signal has lasted a certain period of time. More specifically, this step determines if the indices of maximum values in consecutive frames are identical. If so, then in step 314 the DSP 106 computes the ratio or gain of the maximum value from the current and prior frame for each of the row and column frequencies. In other words, in step 314 the DSP 106 computes:

$$G(1) = M(1) / M'(1);$$

$$G(2) = M(2) / M'(2);$$

In steps 316 and 318 the DSP 106 determines if the computed ratios $G1$ and $G2$ are within a range $> 1/TG$ and $< TG$.

If the DSP 106 detects a DTMF signal which meets all of the criteria described above in steps 130 - 134, then the DSP 106 compares the maximum values with the values at the previous frame only if the indices remain the same. If the ratio, i.e., the result of the division, of the maximum values from the current and prior frame is greater than the value Tg , then the signal passes the guard-time check. It is noted that the value Tg is a programmable value that can be changed to meet different guard-time requirements. The value

Tg is preferably 2.5. Thus in step 136 of Figure 2 the DTMF detector 102 determines if the detected signal is of sufficient length to actually be a DTMF signal.

If the guard time check fails, the DSP 106 waits for the computation of next frame and compares the maximum value of current frame with the maximum value in the next frame, also assuming that the row and column indices remain the same. If the result is greater than Tg, the signal still passes the guard-time check. If this comparison fails again, then the signal on the current frame fails the guard-time check and cannot be recognized as a valid DTMF signal.

Step 138 - Twist Computation and Thresholding

If the signal passes all of the above steps, then the final stage of evaluation is the twist check. Like the other parameters described above, twist is another important criteria to eliminate unqualified signals. The twist of a DTMF signal is defined as the level difference in dB between the higher and the lower tone.

$$\text{Twist} = 20 \log_{10} \frac{M(2)}{M(1)}$$

Thus, if the twist is positive, the higher frequency level tone (the column frequency) is greater than the lower frequency level tone (the row frequency). In this instance, the twist is called forward twist. If the twist is negative, i.e., if the higher frequency level tone (the column frequency) is less than the lower frequency level tone (the row frequency), then the twist is called backward twist. A telecom standard typically defines a twist allowance between a forward twist threshold and a backward twist threshold. For example, AT&T requires:

$$-8 \text{ dB} < \text{twist} < +4 \text{ dB}$$

When a DTMF signal travels through a telephone channel, distortion and noise are added to the DTMF signal and cause phase delay, group delay and even severe amplitude distortion. These factors complicate the twist computation. According to the present invention, the DTMF detector 102 performs a twist computation only when the signal becomes stable. The DSP 106 monitors the outputs M[1] and M[2], which are the gain adjusted outputs from step 128, and only updates the twist value when both the higher and lower tone level in the current frame is greater then the previous frame, assuming that the row and column indexes, I[1] and I[2], remain the same. This method is illustrated in Figure 10 and is executed as the following pseudo-code:

```

30      IF I[1] == I'[1] AND I[2] == I'[2] THEN
          IF M[1] > M'[1] AND M[2] > M'[2] THEN
              Twist = 20 log10 (M[2]/M[1])
          ELSE
35              Twist = Twist'
          ENDIF
      ENDIF

```

In practical implementation, only a linear twist value is computed to avoid logarithmic computation, and the linear twist value is then compared with linear twist thresholds to determine if the detection meets the twist requirement.

Note: Twist' is the twist value for the previous frame

5

I'[1] is I[1] in the previous frame, I'[2] is I[2] in the previous frame

M'[1] is M[1] in the previous frame, and M'[2] is M[2] in the previous frame

DTMF Receiver Results Using MITEL 7292 Test Tape

10

The following tests were performed on the DTMF detector of the present invention using the Mitel 7292 test tape.

Test 1: Frequency Distortion Allowance

Digit	1	5	9	D
Low Band	+2.5%	+2.8%	+2.4%	+2.2%
Group	-2.7%	-2.3%	-2.4%	-2.0%
High Band	+2.5%	+2.0%	+2.1%	+2.0%
Group	-2.8%	-2.8%	-2.3%	-2.0%

Test 2: Twist Test

Digit	1	5	9	D
Forward Twist	+3.7 dB	+3.7 dB	+3.5 dB	+3.7 dB
Backward Twist	-8.0 dB	-7.5 dB	-7.5 dB	-8.0 dB

Test 3: Dynamic Range Test

5 34 dB (Maximum Input Signal dynamic range)

Test 4: Guard-time Test : 28.9 ms.

Test 5: Signal to Noise Ratio Test

10

Input SNR	24 dB	18 dB	12 dB
Detection	1000/1000	1000/1000	1000/1000

Test 6: Talk-off Test:

15

6 hits (one real DTMF signal and five false detections).

System Requirements:

Processing power: < 1.2 MIPS.

20

ROM usage: 314 words.

RAM usage: 69 words.

Conclusion

Therefore, the present invention comprises a system and method for performing DTMF detection with improved speed and accuracy. The combined methods of using varying frame sizes, combined static/dynamic thresholding, second harmonic thresholding, guard-time protection, and twist computation provide very good talk-off performance. The DTMF detector 102 of the present invention only has about 6 hits running the Mitel CM7291 standard test tape, whereas an algorithm which registers less than 10 hits is considered very good. The present invention also provides excellent performance in meeting other parameter criterias.

Although the system and method of the present invention has been described in connection with the preferred embodiment, it is not intended to be limited to the specific form set forth herein, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents, as can be reasonably included within the spirit and scope of the invention as defined by the appended claims.

Claims

1 1. A method for detecting dual tone multifrequency (DTMF) signals, comprising:
2 receiving a plurality of digital samples of a received signal, wherein said received signal includes a
3 plurality of tones, wherein said plurality of tones comprise two or more tones from a plurality of different
4 uncorrelated frequencies, wherein said plurality of different uncorrelated frequencies comprise two or more
5 frequency groups;
6 calculating a frequency spectrum on said plurality of digital samples for each of said plurality of
7 different uncorrelated frequencies, wherein said calculating uses a frame length N comprising at least a
8 subset N of said digital samples for each of said different uncorrelated frequencies, wherein said calculating
9 uses a different frame length N of said digital samples for at least a plurality of said different uncorrelated
10 frequencies, wherein said calculating produces an energy value for each of said different uncorrelated
11 frequencies;
12 determining maximum values of said energy values for each of said two or more frequency groups
13 to detect said plurality of tones in said received signal.

1 2. The method of claim 1, wherein said calculating a frequency spectrum using different
2 frame lengths N produces differing energy contents in a plurality of said energy values, the method further
3 comprising:
4 multiplying gain values with at least a plurality of said energy values to adjust the gain of said
5 energy values, wherein said multiplying occurs after said calculating a frequency spectrum on said plurality
6 of digital samples and prior to said determining maximum values of said energy values.

1 3. The method of claim 2, wherein said multiplying gain values with at least a plurality of said
2 energy values to adjust the gain of said energy values comprises multiplying different gain values with at
3 least a plurality of said energy values, wherein the magnitudes of said different gain values depend on the
4 size of said different frame lengths N for said different uncorrelated frequencies, wherein the magnitudes of
5 said different gain values further depend on the difference between said uncorrelated frequencies and said
6 calculated frequency spectrum;
7 wherein said different gain values compensate for said differing energy contents in said plurality of
8 said energy values.

1 4. The method of claim 1, wherein said different frame lengths N are designed to optimally
2 align said calculated frequency spectrum at said different uncorrelated frequencies for each of said plurality
3 of different uncorrelated frequencies.

1 5. The method of claim 1, wherein said calculating a frequency spectrum on said plurality of
2 digital samples for each of said plurality of different uncorrelated frequencies comprises performing a
3 Goertzel algorithm on said plurality of digital samples for each of said plurality of different uncorrelated
4 frequencies;

5 wherein said performing said Goertzel algorithm uses a different frame length N of said digital
6 samples for a plurality of said different uncorrelated frequencies.

1 6. The method of claim 1, wherein said calculating a frequency spectrum on said plurality of
2 digital samples for each of said plurality of different uncorrelated frequencies comprises performing a
3 Discrete Fourier Transform (DFT) on said plurality of digital samples for each of said plurality of different
4 uncorrelated frequencies;

5 wherein said performing said DFT uses a different frame length N of said digital samples for a
6 plurality of said different uncorrelated frequencies..

1 7. The method of claim 1, wherein said plurality of different uncorrelated frequencies
2 comprise two frequency groups including a first frequency group comprising frequencies 697 Hz, 770 Hz,
3 852 Hz, and 941 Hz, and a second frequency group comprising frequencies 1209 Hz, 1336 Hz, 1477 Hz, and
4 1633 Hz.

1 8. The method of claim 7, wherein said different frame lengths N have the following values
2 for said first and second frequency groups:

<u>DTMF frequency</u>	<u>N</u>
697 Hz	172
770 Hz	177
852 Hz	178
941 Hz	178
1209 Hz	172
1336 Hz	168
1477 Hz	168
1633 Hz	176

1 9. The method of claim 1, wherein said calculating a frequency spectrum comprises
2 calculating a frequency spectrum on said plurality of digital samples for first and second harmonics of each
3 of said plurality of different uncorrelated frequencies;

4 wherein said calculating uses the same frame length N of said digital samples for both said first and
5 second harmonics, and uses a different frame length N for a plurality of said different uncorrelated
6 frequencies.

1 10. The method of claim 1, further comprising:
2 receiving said received signal, wherein said received signal includes a plurality of tones, wherein
3 said plurality of tones comprise two or more tones from a plurality of different uncorrelated frequencies,
4 wherein said plurality of different uncorrelated frequencies comprise two or more frequency groups; and
5 performing analog to digital conversion on said received signal to produce said plurality of digital
6 samples of said received signal.

1 11 A dual tone multifrequency detector for detecting dual tone multifrequency (DTMF)
2 signals, comprising:
3 means for receiving a plurality of digital samples of a received signal, wherein said received signal
4 includes a plurality of tones, wherein said plurality of tones comprise two or more tones from a plurality of
5 different uncorrelated frequencies, wherein said plurality of different uncorrelated frequencies comprise two
6 or more frequency groups;
7 a digital signal processor for calculating a frequency spectrum on said plurality of digital samples
8 for each of said plurality of different uncorrelated frequencies, wherein said digital signal processor uses a
9 frame length N comprising at least a subset N of said digital samples for each of said different uncorrelated
10 frequencies, wherein said digital signal processor uses a different frame length N of said digital samples for
11 at least a plurality of said different uncorrelated frequencies, wherein said digital signal processor produces
12 an energy value for each of said different uncorrelated frequencies;
13 wherein said digital signal processor determines maximum values of said energy values for
14 each of said two or more frequency groups to detect said plurality of tones in said received signal.

15

1 12. The dual tone multifrequency detector of claim 11, wherein said digital signal processor
2 calculating a frequency spectrum using different frame lengths N produces differing energy contents in a
3 plurality of said energy values;
4 wherein said digital signal processor multiplies gain values with at least a plurality of said energy
5 values to adjust the gain of said energy values.

1 13. The dual tone multifrequency detector of claim 12, wherein said digital signal processor
2 multiplies different gain values with at least a plurality of said energy values, wherein the magnitudes of said
3 different gain values depend on the size of said different frame lengths N for said different uncorrelated
4 frequencies;
5 wherein the magnitudes of said different gain values further depend on the difference between said
6 uncorrelated frequencies and said calculated frequency spectrum;
7 wherein said different gain values compensate for said differing energy contents in said plurality of
8 said energy values.

1 14. The dual tone multifrequency detector of claim 12, wherein said different frame lengths N
2 are designed to optimally align said calculated frequency spectrum at said different uncorrelated frequencies
3 for each of said plurality of different uncorrelated frequencies.

1 15. The dual tone multifrequency detector of claim 11, wherein said digital signal processor
2 performs a Goertzel algorithm on said plurality of digital samples for each of said plurality of different
3 uncorrelated frequencies;
4 wherein said digital signal processor uses a different frame length N of said digital samples for a
5 plurality of said different uncorrelated frequencies in performing said Goertzel algorithm.

1 16. The dual tone multifrequency detector of claim 11, wherein said digital signal processor
2 performs a Discrete Fourier Transform (DFT) on said plurality of digital samples for each of said plurality of
3 different uncorrelated frequencies;

4 wherein said digital signal processor uses a different frame length N of said digital samples for a
5 plurality of said different uncorrelated frequencies in performing said DFT.

1 17. The dual tone multifrequency detector of claim 11, wherein said plurality of different
2 uncorrelated frequencies comprise two frequency groups including a first frequency group comprising
3 frequencies 697 Hz, 770 Hz, 852 Hz, and 941 Hz, and a second frequency group comprising frequencies
4 1209 Hz, 1336 Hz, 1477 Hz, and 1633 Hz.

5

1 18. The dual tone multifrequency detector of claim 17, wherein said different frame lengths N
2 have the following values for said first and second frequency groups:

3		
4	<u>DTMF frequency</u>	<u>N</u>
5	697 Hz	172
6	770 Hz	177
7	852 Hz	178
8	941 Hz	178
9	1209 Hz	172
10	1336 Hz	168
11	1477 Hz	168
12	1633 Hz	176
13		

1 19. The dual tone multifrequency detector of claim 11, wherein said digital signal processor
2 calculating a frequency spectrum comprises calculating a frequency spectrum on said plurality of digital
3 samples for first and second harmonics of each of said plurality of different uncorrelated frequencies;

4 wherein said calculating uses the same frame length N of said digital samples for both said first and
5 second harmonics, and uses a different frame length N for a plurality of said different uncorrelated
6 frequencies.

1 20. A dual tone multifrequency detector for detecting dual tone multifrequency (DTMF)
2 signals, comprising:

3 a coder/decoder (codec) which receives an analog input signal and generates a plurality of digital
4 samples of the received analog input signal, wherein said received analog input signal includes a plurality of
5 tones, wherein said plurality of tones comprise two or more tones from a plurality of different uncorrelated
6 frequencies, wherein said plurality of different uncorrelated frequencies comprise two or more frequency
7 groups;

8 a digital signal processor for calculating a frequency spectrum on said plurality of digital samples
9 for each of said plurality of different uncorrelated frequencies, wherein said digital signal processor uses a
10 frame length N comprising at least a subset N of said digital samples for each of said different uncorrelated
11 frequencies, wherein said digital signal processor uses a different frame length N of said digital samples for

12 at least a plurality of said different uncorrelated frequencies, wherein said digital signal processor produces
13 an energy value for each of said different uncorrelated frequencies;
14 wherein said digital signal processor determines maximum values of said energy values for
15 each of said two or more frequency groups to detect said plurality of tones in said received signal.

1 21. A method for detecting multi tone multifrequency (MTMF) signals, comprising:
2 receiving a plurality of digital samples of a received signal, wherein said received signal includes a
3 plurality of tones, wherein said plurality of tones comprise two or more tones from a plurality of different
4 uncorrelated frequencies, wherein said plurality of different uncorrelated frequencies comprise one or more
5 frequency groups;
6 calculating a frequency spectrum on said plurality of digital samples for each of said plurality of
7 different uncorrelated frequencies, wherein said calculating uses a frame length N comprising at least a
8 subset N of said digital samples for each of said different uncorrelated frequencies, wherein said calculating
9 uses a different frame length N of said digital samples for at least a plurality of said different uncorrelated
10 frequencies, wherein said calculating produces an energy value for each of said different uncorrelated
11 frequencies;
12 determining maximum values of said energy values for each of said one or more frequency groups
13 to detect said plurality of tones in said received signal.

1 22. The method of claim 21, wherein said calculating a frequency spectrum using different
2 frame lengths N produces differing energy contents in a plurality of said energy values, the method further
3 comprising:
4 multiplying different gain values with at least a plurality of said energy values to adjust the gain of
5 said energy values, wherein said multiplying occurs after said calculating a frequency spectrum on said
6 plurality of digital samples and prior to said determining maximum values of said energy values.

1 23. The method of claim 21, wherein said different frame lengths N are designed to optimally
2 align said calculated frequency spectrum at said different uncorrelated frequencies for each of said plurality
3 of different uncorrelated frequencies.

1 24. The method of claim 21, wherein said calculating a frequency spectrum on said plurality of
2 digital samples for each of said plurality of different uncorrelated frequencies comprises performing a
3 Goertzel algorithm on said plurality of digital samples for each of said plurality of different uncorrelated
4 frequencies;
5 wherein said performing said Goertzel algorithm uses a different frame length N of said digital
6 samples for a plurality of said different uncorrelated frequencies.

1 25. A multi tone multifrequency detector for detecting multi tone multifrequency (MTMF)
2 signals, comprising:

3 means for receiving a plurality of digital samples of a received signal, wherein said received signal
4 includes a plurality of tones, wherein said plurality of tones comprise two or more tones from a plurality of
5 different uncorrelated frequencies, wherein said plurality of different uncorrelated frequencies comprise one
6 or more frequency groups;

7 a digital signal processor for calculating a frequency spectrum on said plurality of digital samples
8 for each of said plurality of different uncorrelated frequencies, wherein said digital signal processor uses a
9 frame length N comprising at least a subset N of said digital samples for each of said different uncorrelated
10 frequencies, wherein said digital signal processor uses a different frame length N of said digital samples for
11 at least a plurality of said different uncorrelated frequencies, wherein said digital signal processor produces
12 an energy value for each of said different uncorrelated frequencies;

13 wherein said digital signal processor determines maximum values of said energy values for
14 each of said one or more frequency groups to detect said plurality of tones in said received signal.

15

1 26. The multi tone multifrequency detector of claim 25, wherein said calculating a frequency
2 spectrum using different frame lengths N produces differing energy contents in a plurality of said energy
3 values;

4 wherein said digital signal processor multiplies a gain value with at least a plurality of said energy
5 values to adjust the gain of said energy values.

1 27. The multi tone multifrequency detector of claim 25, wherein said different frame lengths N
2 are designed to optimally align said calculated frequency spectrum at said different uncorrelated frequencies
3 for each of said plurality of different uncorrelated frequencies.

1 28. The multi tone multifrequency detector of claim 25, wherein said digital signal processor
2 performs a Goertzel algorithm on said plurality of digital samples for each of said plurality of different
3 uncorrelated frequencies;

4 wherein said digital signal processor uses a different frame length N of said digital samples for a
5 plurality of said different uncorrelated frequencies in performing said Goertzel algorithm.

1/10


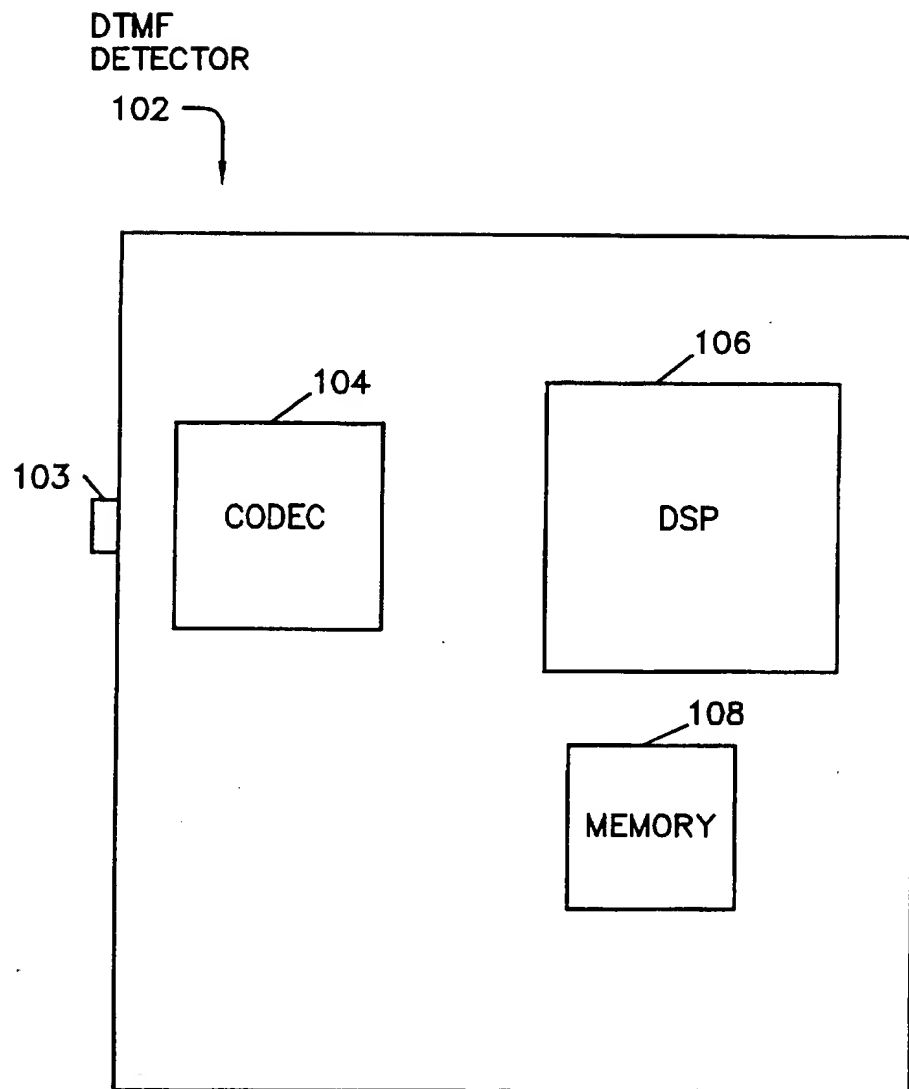


FIG. 1

2/10

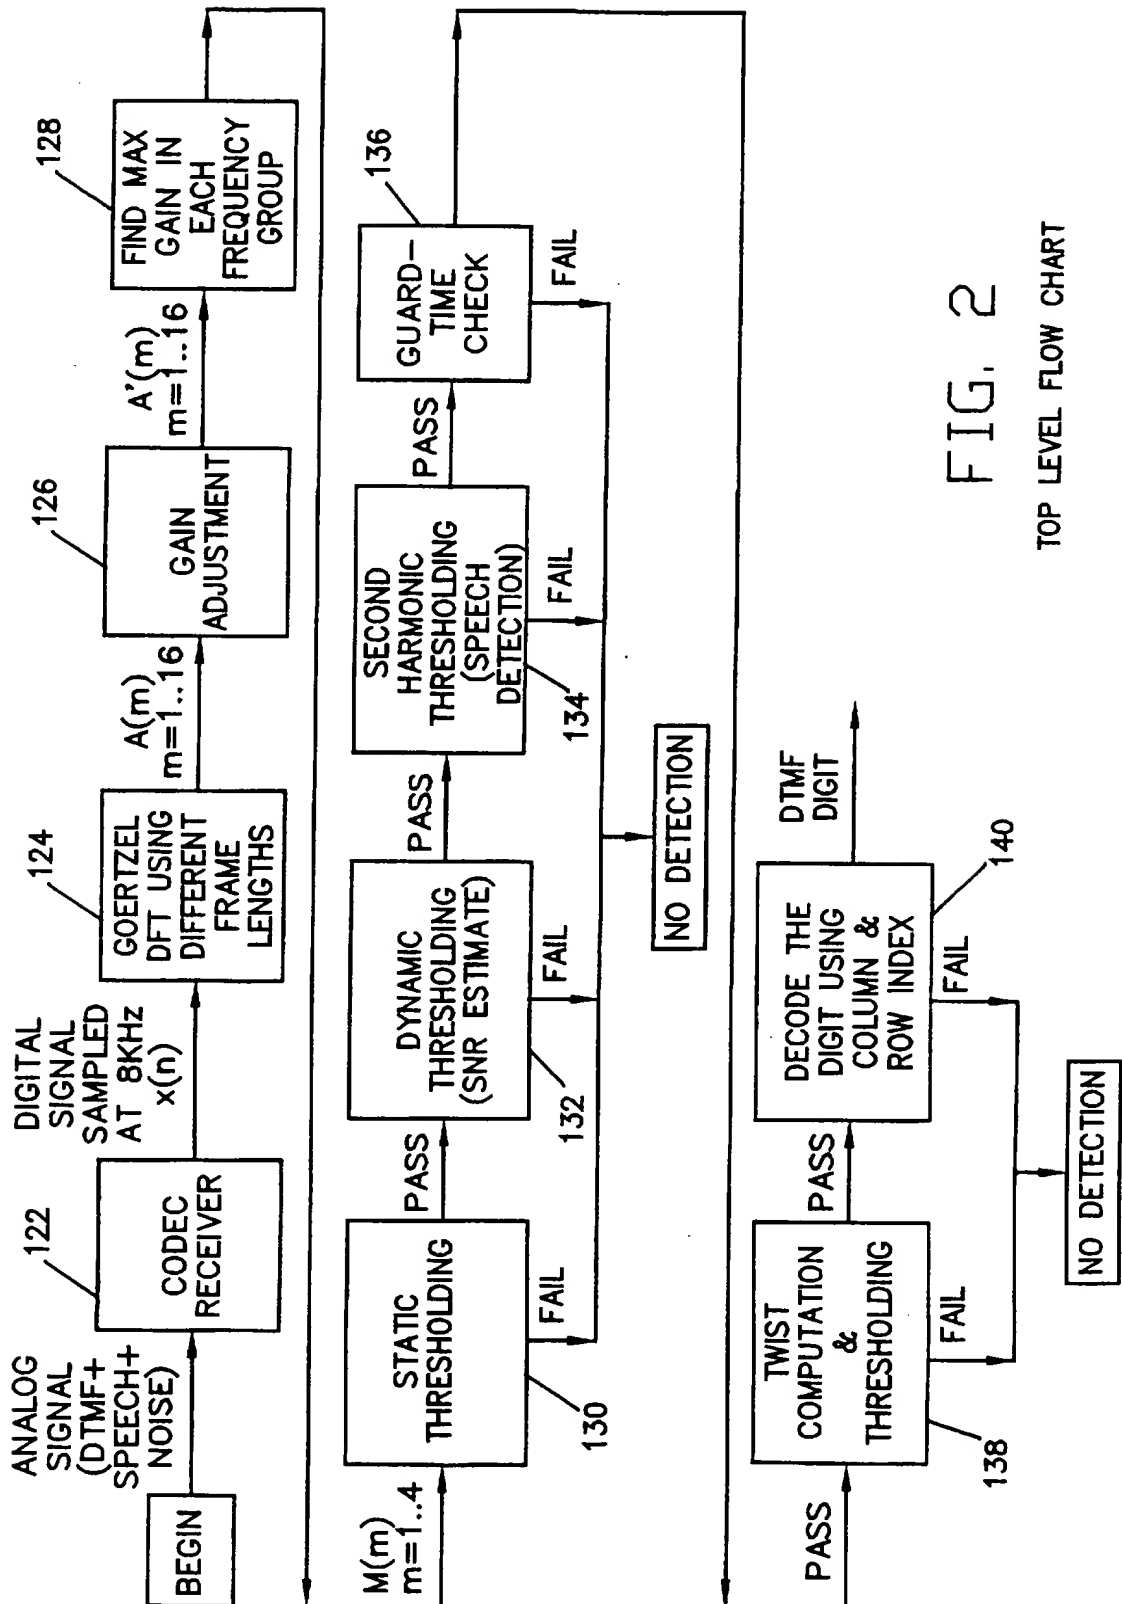

3/10


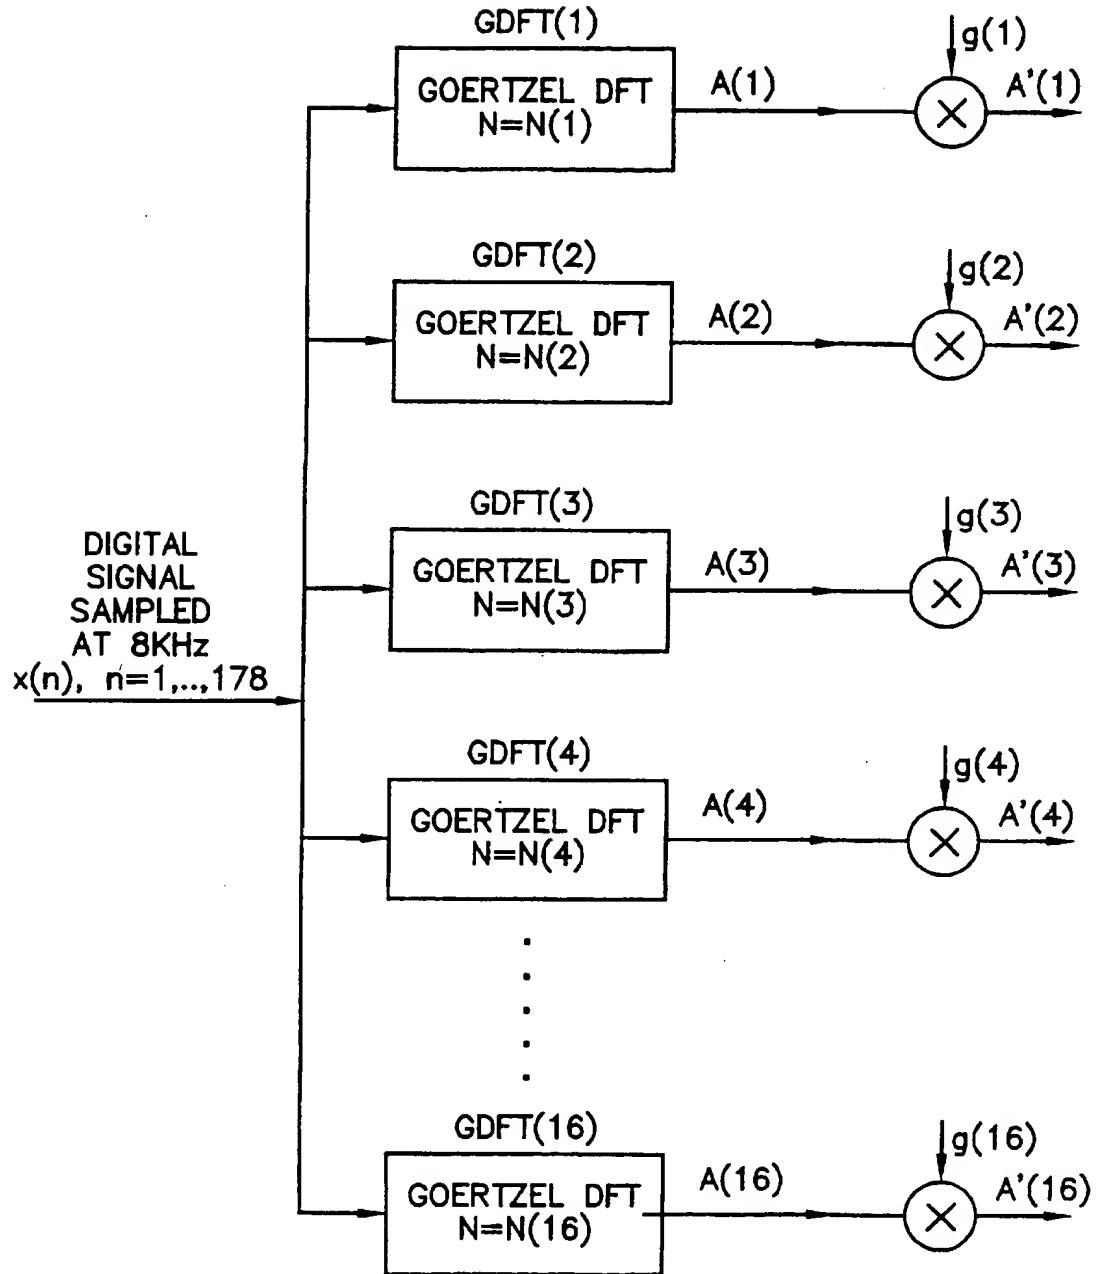

 $N(1)=172; N(2)=177; N(3)=178; N(4)=178; N(5)=172$
 $N(6)=168; N(7)=168; N(8)=176; N(m)=N(m-8), \text{ for } m=9, \dots, 16$

FIG. 3

 GOERTZEL DFT USING DIFFERENT FRAME
 LENGTHS & GAIN ADJUSTMENT

4/10

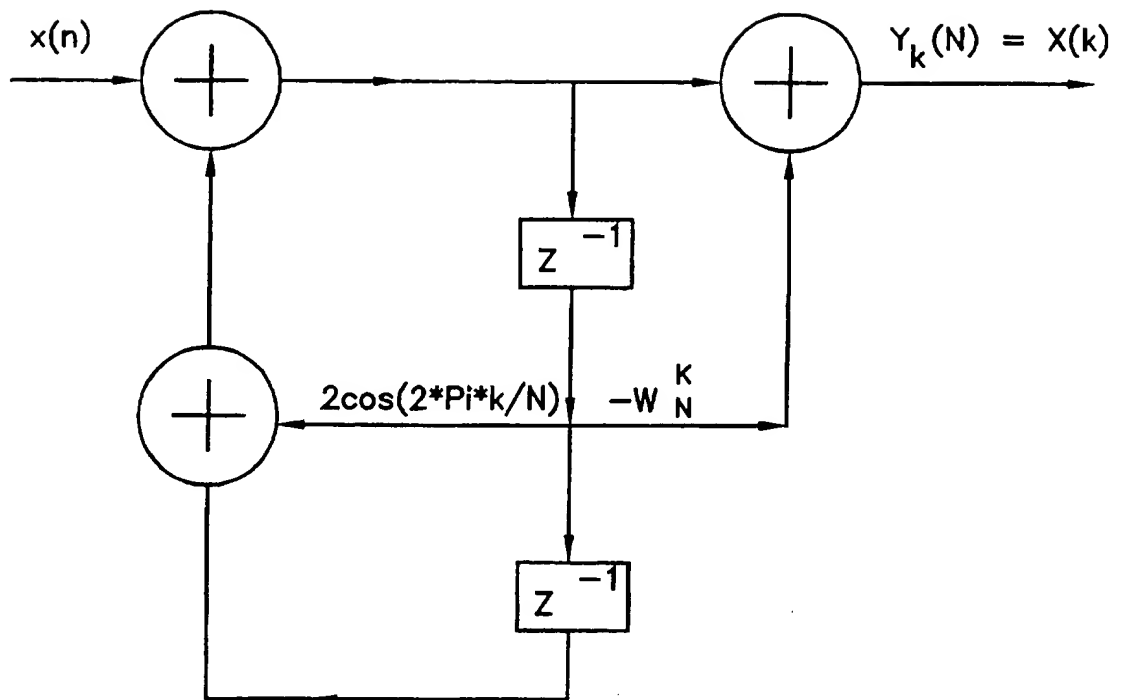

NOTE:

FEEDFORWARD ONLY COMPUTED
WHEN $n=N$ FOR FINAL RESULT

$$-W_N^k = -\exp(-j * 2 \pi * k/N)$$

$$A(k) = \text{amp } X(k)$$

FIG. 4

GOERTZEL ALGORITHM

5/10

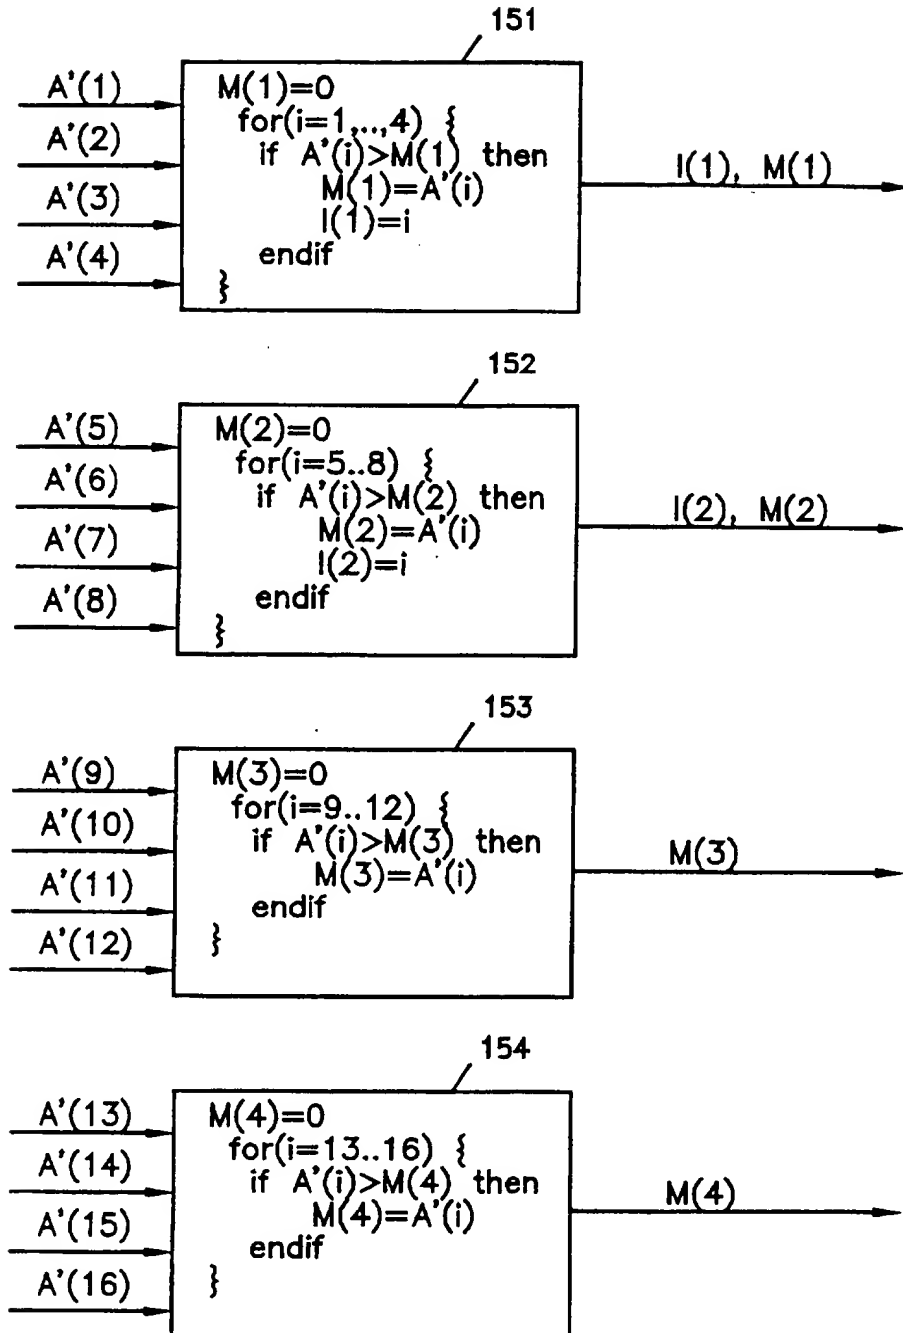


FIG. 5

FIND MAX GAIN IN EACH
GROUP & OBTAIN ITS INDEX

6/10

Ts: STATIC THRESHOLD

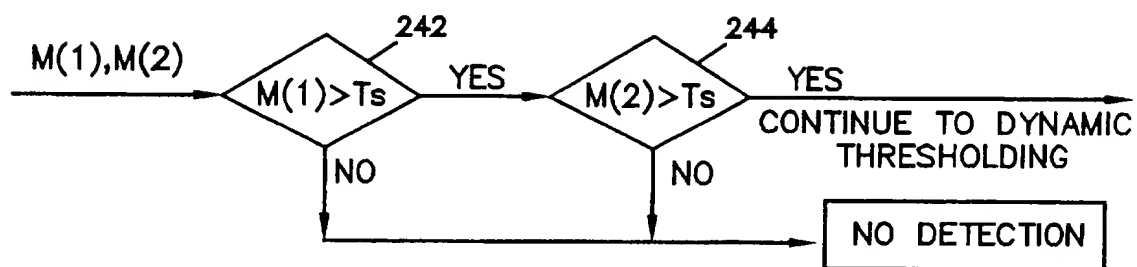


FIG. 6
STATIC
THRESHOLDING

7/10


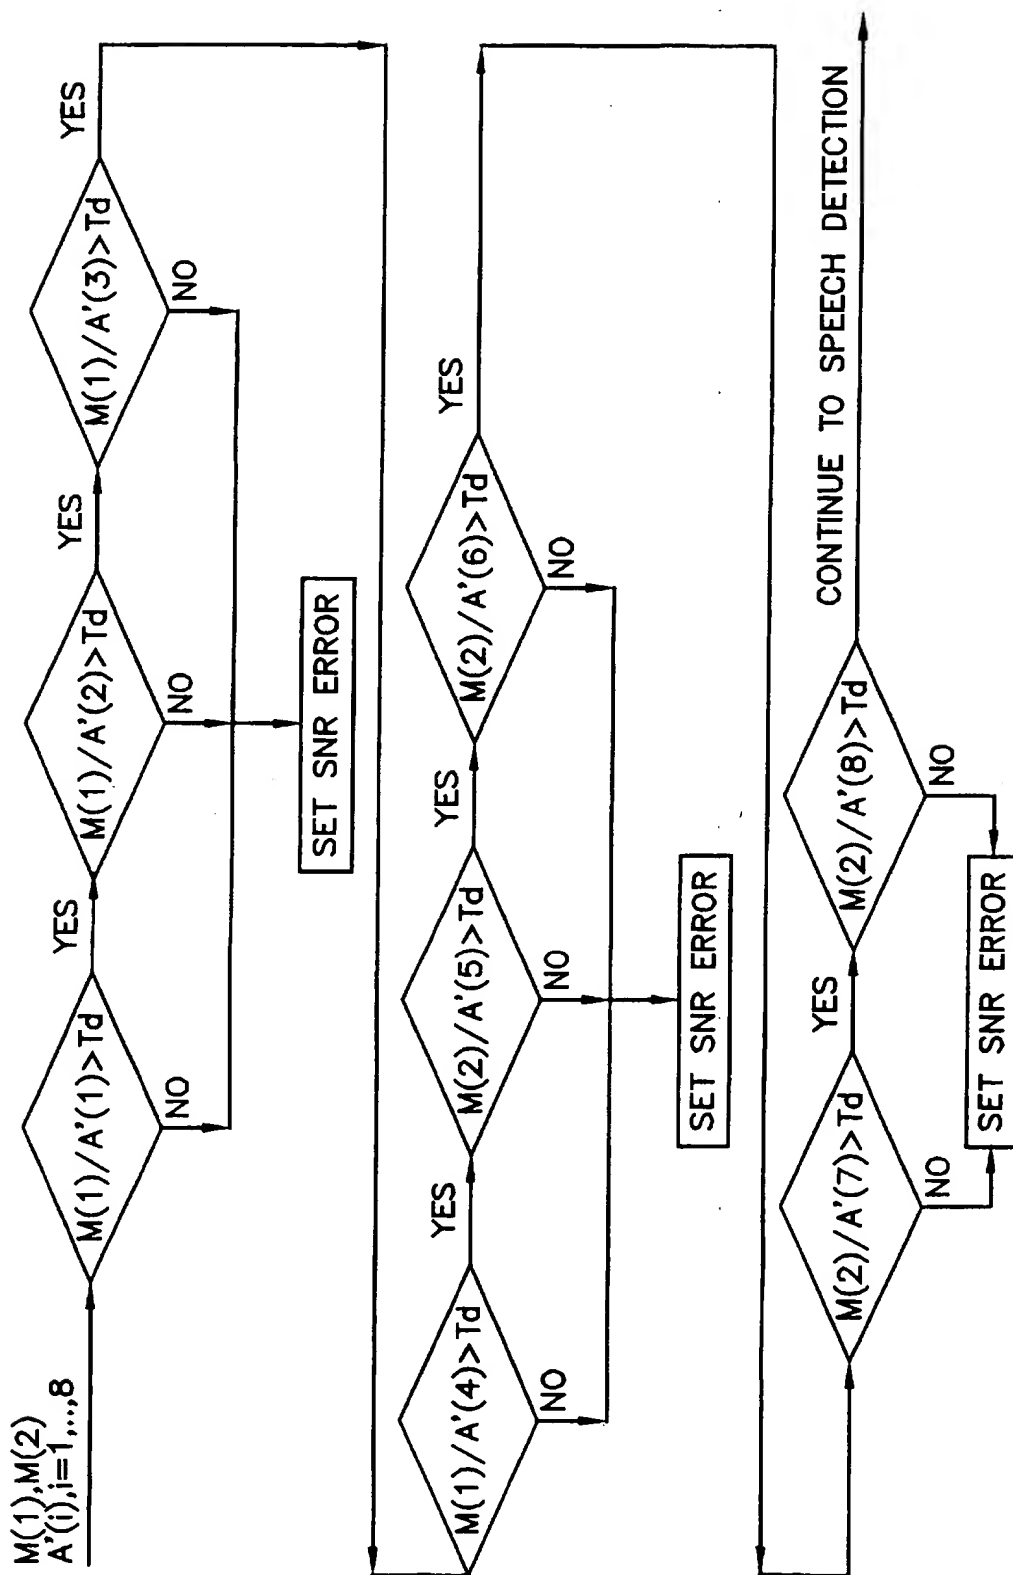


FIG. 7


DYNAMIC THRESHOLDING

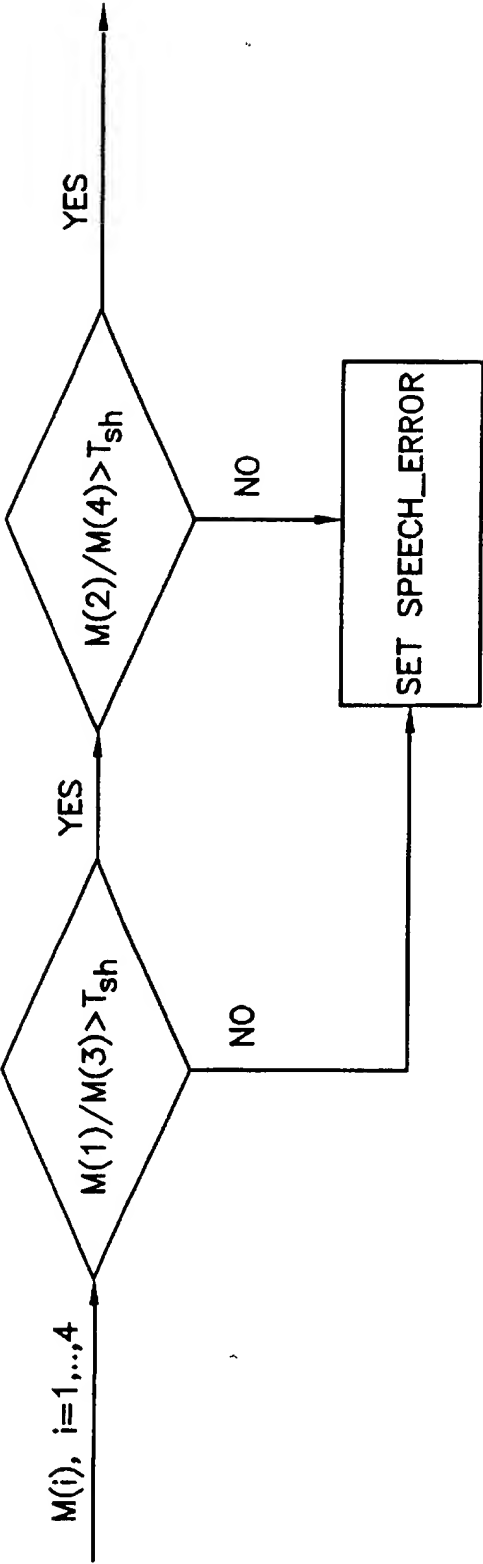

T_{sh} : THRESHOLD USED FOR CHECKING
ENERGY AT 2nd HARMONICS OF DTMF
FUNDAMENTAL FREQUENCIES

FIG. 8
SECOND HARMONIC CHECK FOR
ELIMINATING SPEECH TRIGGER DETECTIONS


9/10

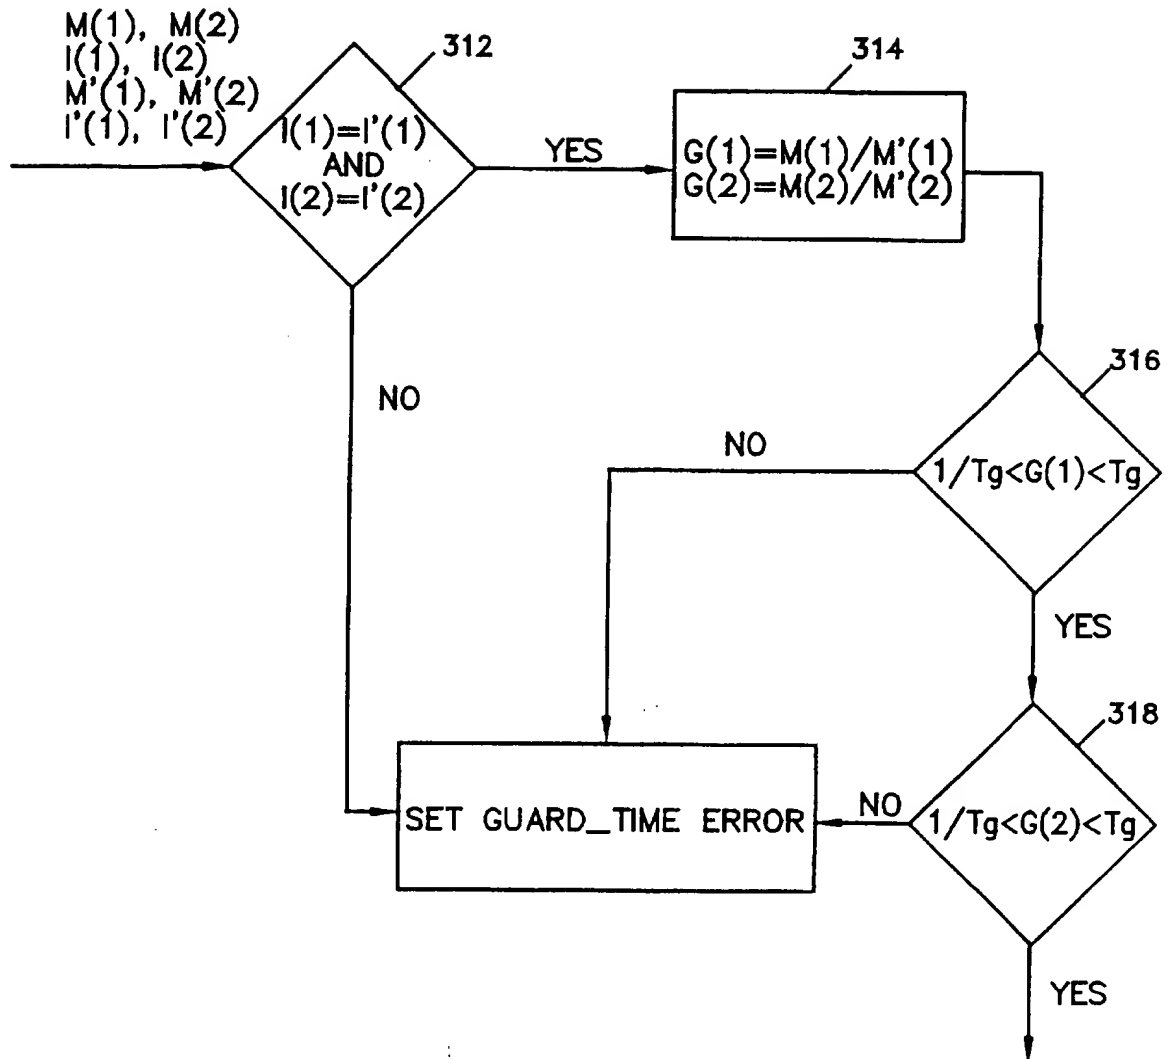

Note: $M'(i)$ IS THE PREVIOUS VALUE OF $M(i)$,
 $I(i)$ IS THE PREVIOUS VALUE OF $I(i)$.
 T_g : GUARD_TIME RATIO

FIG. 9
 GUARD_TIME CHECK

10/10

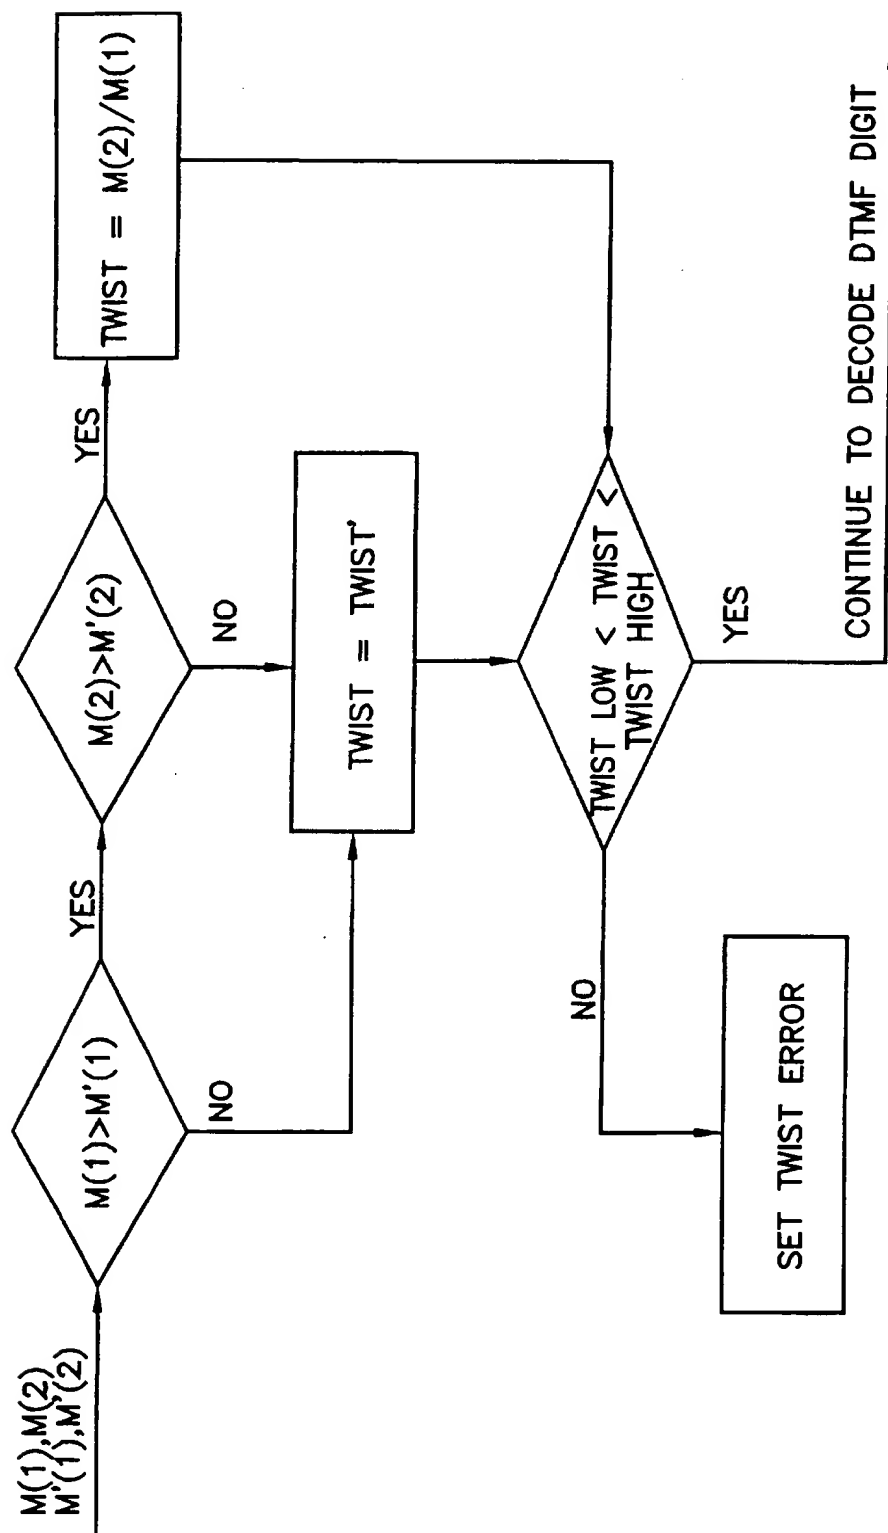

TWIST': TWIST VALUE IN PREVIOUS FRAME

FIG. 10:
TWIST CHECK

INTERNATIONAL SEARCH REPORT

Inter national Application No

PC1/US 96/16492

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q1/457 H04Q1/453

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 38, no. 7, July 1995, ARMONY, NY, US, pages 567-571, XP000521797 "Tone Detection Process" see the whole document	1,4-8, 10,11, 15-18, 20,21, 24,25,28
A	--- EP,A,0 570 097 (AT&T CORP.) 18 November 1993 cited in the application see abstract	1-28
A	--- US,A,5 257 309 (BRANDMAN ET AL.) 26 October 1993 cited in the application see abstract --- -/--	1-28

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

10 February 1997

Date of mailing of the international search report

21.02.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Montalbano, F

INTERNATIONAL SEARCH REPORT

Inter nal Application No

PCi/US 96/16492

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 34, no. 11, April 1992, ARMONY, NY, US, pages 107-112, XP000303199 "Table-Driven Dual-Tone Multi-Frequency Receiver" see the whole document ---	1-28
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 37, no. 7, July 1994, ARMONY, NY, US, pages 383-389, XP000455554 "Triple Tone Multiple Frequency Dialing for Mnemonic Telephone Numbers/ID's" see the whole document -----	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/16492

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-570097	18-11-93	US-A- 5325427	28-06-94
		CA-A- 2089593	24-09-93
		JP-A- 6022349	28-01-94

US-A-5257309	26-10-93	US-A- 5479498	26-12-95
